

Instructions

Installing CU kits KPUFM26 and KPUFM30

The purpose of these kits is to be able to install the CU1526, CU2026 or CU3030 without legs. Most code requires sealing to the floor if no legs are used. Four bolts support the machine while trim strips at the edges provide material for sealant to form onto.


The kits include:

- Four plastic bolts - to act as glides & fasteners
- Eight washers - as shims to adjust machine height
- Two front to back sheet metal trim strips with double sided tape
- Two side to side trim strips
- Two tubes of sealant.

1. Tip the machine on its back. If the skid is in place, remove the bolts holding it to the machine.

2. Attach the front to back trim strips to the bottom of the machine by removing the covering over the tape on the strips and placing them onto the outside edges of the base. There are clearance holes in the strips for the protruding fasteners to go through.

3. Attach the side to side trim strips to the bottom of the machine with the four plastic 5/8-11 bolts. Use 1 or 2 washers as shims between the head of the bolt and the trim strip so the head of the bolt is below the bottom edge of the trim strip. Note that the machine must still be level when in operation.

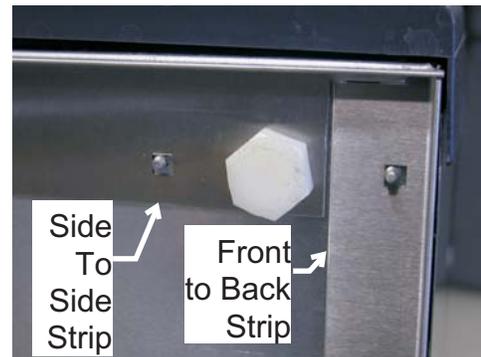

Bottom of Unit

4. Return the machine to an upright position and complete the installation.

Note: Do not start the machine for at least an hour to allow oil to return to the compressor.

5. Place the machine in its final location and seal the edges of the exposed trim strips to the floor using the sealant provided.