SCOTSMAN

UNDERCOUNTER COMPACT CUBER WITH STORAGE



C S 6 0

VOLUME PRODUCTION • 24 HOUR

Certified & rate	Air-Cooled					
in accordance with ARI stan- dard 810-95	ARI 70°/50° 90°/70° lbs/kg. lbs./kg.					
cs60	72/33 49/22					

DEPENDABLE PERFORMANCE IN ANY CONDITION:

- Up to 49 lbs. of ice in 24 hours.
- Stores up to 20 lbs.
- Produces medium size gourmet cubes.
- Cubes are frozen and harvested individually for easy serving.


WARRANTY See your dealer for complete warranty details.

- 3 years parts and labor on all components.
- 5 years parts on the compressor and condenser.




BUILT-IN CONVENIENCE

Under counter bar installation puts the ice where it is needed. Legs allow for cleaning below and aisle ventilation.



Ice Machine Specifications

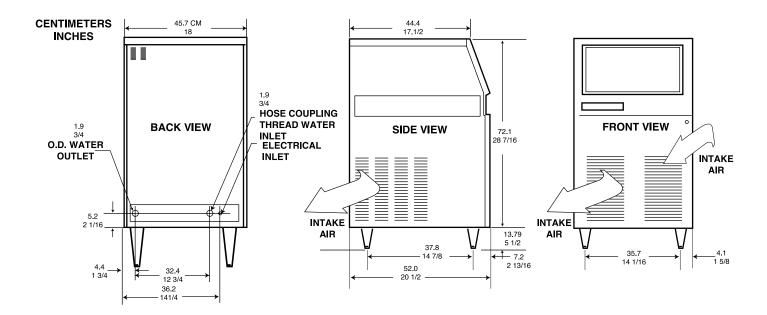

All models: D	Dimensions W x D x H: without legs (Add 6" height for legs):				Unit: 18" x 20 ¹ / ₂ " x 28 ⁷ / ₁₆ "			Shipping Carton: 24" x 21" x 31"			
Model Number	Condenser Unit	Bin* Capacity lbs./kg.	Basic Electrical Volts/Hz/Phase	Max. Fuse Size or HACR Circuit Breaker	Comp. HP	Circuit Wires	Min. Circuit Ampacity	Shipping Weight lbs./kg.	Power Consumption KWH/100 lbs. 90°F/70° F	Water Gallons/ Potable 90°F/70° F	
CS60MAS-1A	Air	20/9	115/60/1	15	1/4	2	5.7	105/48	17.0	64.0	-



*Bin capacity rated in accordance with ARI Standard 820-95.

All units with stainless steel finish. Refrigerant: R22

LEGS SUPPLIED:

Four plastic legs screw into mounting plates on cabinet base. Provides 6" minimum height.

Scotsman's ice machines are not designed for outdoor installations. Scotsman remote condensers are designed for outdoor installations.

Machine requires voltage indicated on rating name plate. Failures caused by improper voltage are not considered factory defects. Extended periods of operation at temperatures exceeding limitations constitutes misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Specifications and design are subject to change without notice.

Consult Your Local SCOTSMAN Representative At:

IMPORTANT OPERATING REQUIREMENTS:

Minimum Maximum Air Temperatures 50°F (10°C) 100°F (37.7°C) Water Temperatures 40°F (4.4°C) 100°F (37.7°C) Water Pressures 20 PSIG 120 PSIG **Electrical Voltage** -5% +10%