## SCOTSMAN

WATER-COOLED MODULAR CONTOUR CUBER



### **BIN OPTIONS:**







BIN: BH1600

### CME1856

#### **VOLUME PRODUCTION • 24 HOUR**


	Certified & rated in accordance with ARI stan- dard 810-95	Water-Cooled			
with A		70°/50° lbs./kg.	ARI 90º/70º lbs./kg.		
сме1856-32		1825/821	1695/763		
сме1856-3		1825/821	1695/763		

#### VALUE THE DIFFERENCE OF CM<sup>3</sup> ICE MACHINES:

- · New Quieter Operation.
- Featuring Food Service Industry's first scroll compressor by Copeland.
- CM<sup>3</sup> series offers the lowest lifetime operating costs based on lower water and electrical usage. Combine that with a competitive purchase price and the best warranty in the industry and you have the lowest lifetime ownership cost. Period.
- AutoIQ™ Control System monitors and controls the ice machines' functions to ensure consistent ice production and reduce operating costs.
- CM3 Evaporator is a hot tin dipped, molecularly bonded plate that has been field tested and proven 99.4% reliable over 5 years.
- Rust-free Polyethylene Base & Food Zone is insulated with 1-1/2" of foam which keeps water and food zone cool to reduce operating costs and is backed by a Lifetime Rust-Free Warranty.
- Contemporary styling and stainless steel finish make the CM<sup>3</sup> a perfect addition to any operation.
- Now protected with AquaArmor™ utilizing AgION™, a silver-based anti-microbial compound that reduces the growth of bacteria, microorganisms, algae, mold and slime on ice machine surfaces. AgION is a trademark of AgION Technologies and is registered with the EPA.

#### **WARRANTY** See your dealer for complete warranty details.

- 3 years parts and labor on all components.
- 5 years parts and labor on the CME evaporator.
- 5 years parts on the compressor and condensor.
- Limited lifetime Rust-Free Parts Warranty on Food Zone.

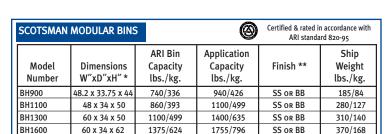

<sup>\*</sup> Add 6" Height for Legs

\*\* SS - All Stainless Steel with Polyethylene Liner. BB - All Stainless Steel Except Galvanized Back and Bottom






APPROX. CUBE SIZE:


13/8" x 13/8" x 5/8" THICK







# Ice Machine Specifications

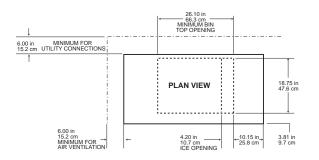





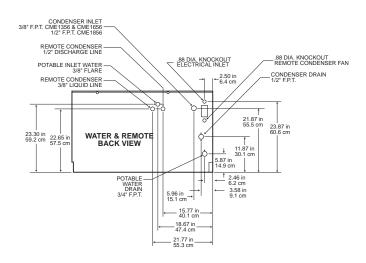

	All models: Dimensions: W x D x H Unit: 48" x 24" x 28" Shipping Carton: 51" x 27" x 31"											
	Model Number	Condenser Unit	Basic Electrical Volts/Hz/Phase	Max. Fuse Size or HACR Circuit Breaker	Comp. HP	Circuit Wires	Min. Circuit Ampacity	BTU's per hour	Shipping Weight Ibs./kg.	Power Consumption KWH/100 lbs. 90°F/70° F	Water Gallons/ Potable 90°F/70° F	
	CME1856WS-32C	Water	208-230/60/1	40	4	2	30	31,500	386/174	5.2	19.0	160
	CME1856WS-3C	WATER	208-230/60/3	30	4	3	20	31,500	381/171	5.1	19.0	150
L.												

All units with Stainless Steel finish. Refrigerant - R404A. OPTIONS: Stacking Kit: KSCME6-LG-B

 $Scotsman's ice \ machines \ are \ not \ designed \ for \ outdoor \ installations. \ Scotsman \ remote \ condensers \ are \ designed \ for \ outdoor \ installations.$ 

Machine requires voltage indicated on rating name plate. Failures caused by improper voltage are not considered factory defects. Extended periods of operation at temperatures exceeding limitations constitutes misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Specifications and design are subject to change without notice.

Consult Your Local SCOTSMAN Representative At:

#### IMPORTANT OPERATING REQUIREMENTS:

IMI OKIANI OI EKAINO KEQOIKEMENIS.						
	Minimum	Maximum				
Air Temperatures	50°F (10°C)	100°F (37.7°C)				
Water Temperatures	40°F (4.4°C)	100°F (37.7°C)				
Remote Cond. Temps	-20°F (-28.9°C)	120°F (48.9°C)				
Water Pressures	20 PSIG	120 PSIG				
Electrical Voltage	-5%	+10%				

#### YOU'LL VALUE THE DIFFERENCE™