

NB1322 – 1300 lb Nugget Ice Machine

Prodigy® Advanced Sustainability Modular Nugget Ice Maker

PRELIMINARY



Shown on B948S bin with optional KLP8S legs

Features

The path to a more sustainable operation is through Prodigy Advanced Sustainability™. Integrated controls for optimizing energy and water efficiency and enhanced service diagnostic capability, help operations save money and natural resources.

Ultimate ice level management with a programmable seven-day 15 set-point system. Choose the amount of ice you need, when you want to make it.

An advanced network control system provides information about the machine's performance history to maximize operational uptime. If an issue does occur, Prodigy Advanced Sustainability can self-diagnose the issue and benchmark it. Maintenance can be accomplished faster and more effectively.

Visually communicates the machine's current status through five easy-to-understand LED-lighted universal symbols. Immediately alerts staff to key operational issues to minimize performance interruptions and ensure maintaining appropriate ice production levels. Tone/buzzer feature reinforces light symbols.

Warranty start date is stored in the controls for easy access and preventative maintenance scheduling as well as asset control management.

Preventative maintenance is simpler than ever with easily-removed panels allowing clear access to internal components. Reusable air filter is easily removable from the outside

Prodigy Nugget Ice machines are highly efficient, using up to 50% less water and 15% less energy than cube ice machines.

24 Hour Volume Production

Air Cooled

70°F/21°C Air 90°F/32°C 70°F/21°C Water 70°F/21°C Ib/kg 1180/535 950/431

Nugget Ice





The Original Chewable Ice™. Soft ice ideal for beverages and blended drinks.

c UL us











Modular Bin Options

Model Number	Dimensions W" x D" x H"	AHRI Certified Bin Capacity Ib/kg	Application Capacity Ib/kg	Ship Weight lb/kg
B948S*	48 x 34 x 44**	893/406	700/319	220/100
BH1100BB/SS	48 x 34 x 50**	1100/499	860/390	280/127
BH1300BB/SS	60 x 34 x 50**	1400/635	1100/499	310/140
BH1600BB/SS	60 x 34 x 62**	1755/796	1375/624	370/168

^{*} Contact Scotsman for bin top requirements. **Add 6" H for bin legs.

NB1322 shown side by side on B9485 bin.



Warranty

- 3 years parts and labor on all components.
- 5 years parts and the compressor.

Warranty valid in North, South & Central America. Contact factory for warranty in other regions.

Scotsman Ice Systems · 775 Corporate Woods Parkway · Vernon Hills, IL 60061 1-800-SCOTSMAN

Fax: 847-913-9844


 $\pmb{\text{E-mail: customer.relations@scotsman-ice.com}}\\$



Revit drawings available at www.scotsman-ice.com



Water Usage

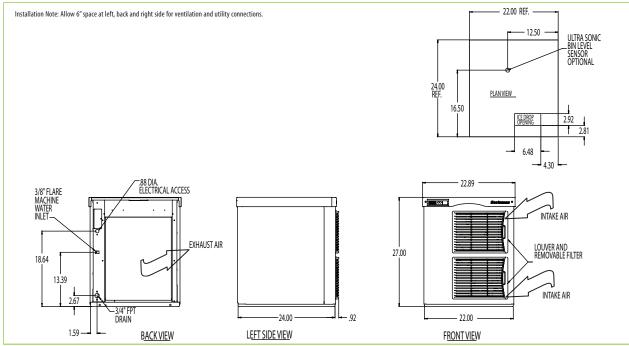

Specifications

Specifications						Gallons/100 lb (liters/45.4 kg)			
Model Number* Cube Size:: small	Condenser Unit	Basic Electrical Volts/Hz/Phase	Max. Fuse Size or HACR Circuit Breaker (amps)	Circuit Wires	Min. Circuit Ampacity	Energy Consumption kWh/100 lb (45.4 kg) 90°F(32°C)/70°F(21°C)	Potable 90°F(32°C)/ 70°F(21°C)	Condenser 90°F(32°C)/ 70°F(21°C)	
NB1322A-32	Air	208-230/60/1	30	2	19.1	4.2	12.0/45.5	-	

All Models

Dimensions (W x D x H):

Unit:

22.9" x 24" x 27" (58.2 x 61.0 x 68.6 cm)

Shipping Carton: 25.5" x 27.5" x 32.5"

25.5" x 27.5" x 32.5" (64.8 x 69.9 x 82.6 cm)

Shipping Weight:

225 lb / 102 kg BTUs per hour:

16,000

Refrigerant:

Accessories

(00000011)			
Model Number	Description		
KPFSA227	Side Air Flow Kit for 27" Tall Prodigy Flaker and Nugget		
	January Control of the Control of th		

* Scotsman recommends all ice machines have water filtration. See Scotsman Sanitation Matrix for details.

Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	100°F (38°C)
Remote Cond. Temps	-20°F (-29°C)	120°F (49°C)
Water Pressures	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)
Electrical Voltage	-10%	+10%

Scotsman Ice Systems · 775 Corporate Woods Parkway · Vernon Hills, IL 60061

1-800-SCOTSMAN

Fax: 847-913-9844

E-mail: customer.relations@scotsman-ice.com

www.scotsman-ice.com

