



SCV32 & RFE33- Companion Consumer Products

SCV32 & RFE33 – Companion Consumer Products

Wine Storage Unit & Refrigerator



Wine Storage Unit Features

- 15" cabinet width, 32 bottle capacity.
- Always on interior light for dramatic effect.
- 3 temperature zones (approx. 45°F, 50-55°F, and 60°F) for storage capacity.
- Interchangable racks
- Tinted, thermal-tempered reversing glass door.
- Perfect match with Scotsman Ice Machine or Refrigerator...



Refrigerator Features


- 15" cabinet width, 3 Cubic feet of capacity.
- Deep door shelves for added versatility.
- Convenient freezer compartment.
- Removable shelves for added versatility.
- Adjustable cold control and push button defrost.
- Perfect match with Scotsman Ice Machine or Wine Storage Unit..



Warranty

- 1 years parts and labor on all components.
- 5 years parts on the compressor only.

Warranty valid in North America.

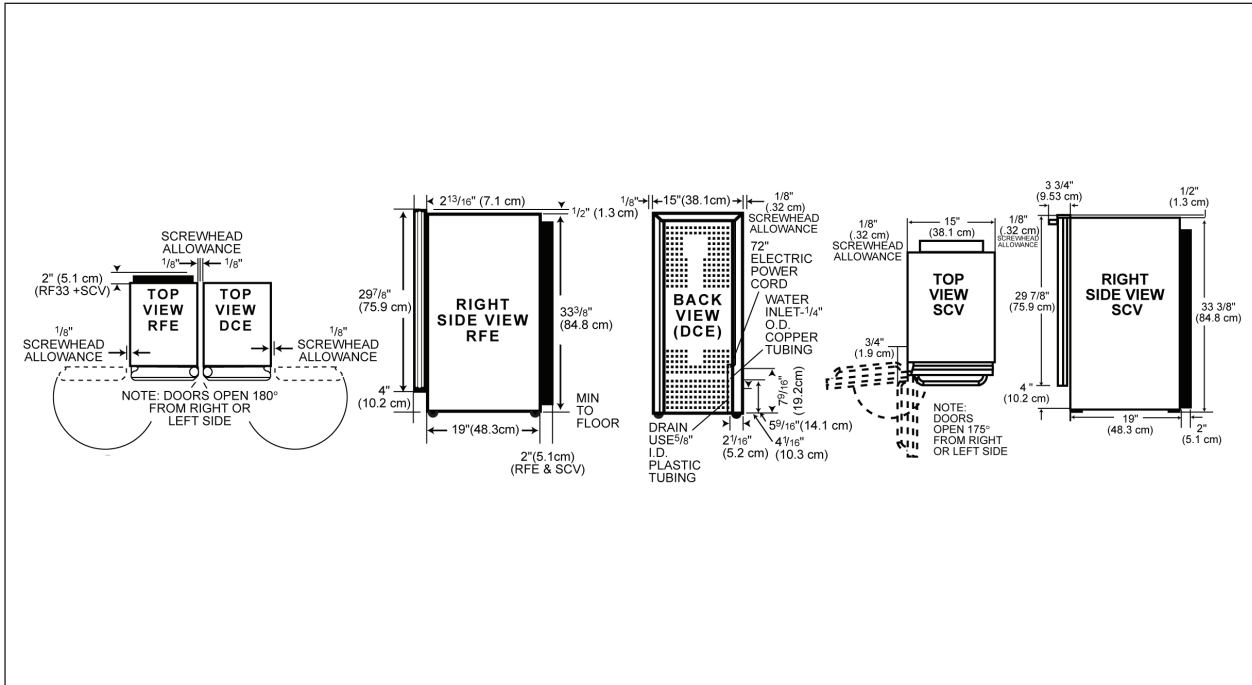

All Models

Storage Capacity SCV32:
32 bottles

Storage Capacity RFE33
3.0 cu. ft.

Condenser Type:
Air

Basic Electrical:
(Volts/Hz/Phase)
115/60/1

Amps:
1.0 (SCV32)
1.08 (RFE33)

Maximum Fuze Size:
15

Refrigerant:
R-134A

Dimensions (W x D x H):
Unit (without legs):
SCV32 15" x 24.75" x 33.875"
(38.1 x 62.87 x 86.04 cm)

RFE33 15" x 23.8125 x 33.875"
(38.1 x 60.46 x 86.04 cm)

Shipping Carton:
18" x 26" x 38"
(45.7 x 66.0 x 96.5 cm)

Specifications

Model	Finish Cabinet / Front	Shipping Weight lb / kg
SCV32-1SC	Black / Stainless Steel	82 / 37
RFE33A-1BC	Black / Black	82 / 37

Accessories

Model	Description	Shipping Weight lb / kg
KHAND	Custom Handle Trim Piece (Top)	1 / 0.45
KRF1	Flat Rack (1) for SCV only	1 / 0.45
KSS	Wrap Around Stainless Steel Door Sleeve Kit for RFE only	12 / 5.5
SS-33	Stainless Steel Front Panel Kit for RFE only	9 / 4

Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures		
Water Pressures		
Electrical Voltage	-10%	+10%

Machine requires voltage indicated on rating name plate. Failures caused by improper voltage are not considered factory defects. Scotsman products, except model SCCG50MA-1SS & SCCP5050MA-1SS, are not designed for outdoor installations nor for installation where air temperatures fall below 50°F. or exceed 100°F., nor where water temperatures fall below 40°F. or exceed 100°F. Extended periods of operation at temperatures exceeding these limitations constitute misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Refer to owner's manual for all installation requirements. Please note: when installed in a corner, the door swing may be limited due to handle contact with the wall or cabinet face.